

Equipped with audio board


FPV Video Receiver

VRX-S5

1.7/1.9G 8CH -97dBm

KEY FEATURES

- Channels: 8CH
- Input Voltage: 7-36VDC (2-6S)
- Output Voltage: 5VDC/0.5A
- Video Format: PAL/NTSC
- Audio Output: Supported
- High Sensitivity: -97dBm(MAX)
- Weight: 18g (excluding antenna)
- Dimensions: L47 x W27 x H28.8mm
- Antenna Interface: SMA (male thread, female pin)
- Modulation Type: FM
- Channel Selection: Short press to switch frequency points.
- Device Compatibility: Direct connection with FatShark, Skyzone goggles, or other analog displays

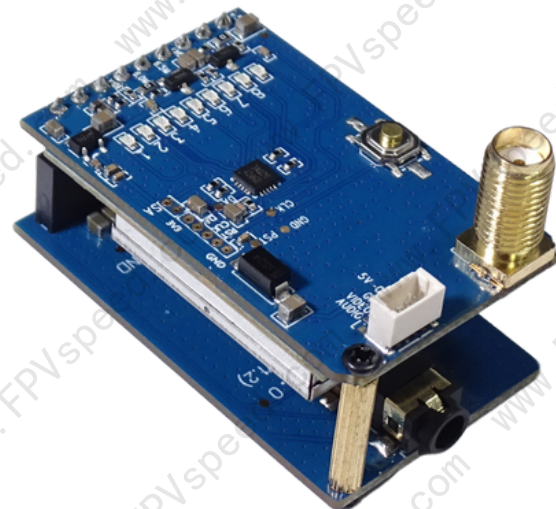

APPLICATIONS

- FPV Drone Racing
- UAV Communication Systems
- Remote Vehicle Monitoring
- Wireless Video Transmission Systems

FREQUENCY SPECIFICATIONS

- Use a single button to adjust frequency channels. Short press to switch channel.
- The green LED indicator will light up continuously, indicating the current channel.

Short Press to Switch Channels	Frequency Channel	CH1	CH2	CH3	CH4	CH5	CH6	CH7	CH8
	Green Indicator Light Always on		1680 MHz	1720 MHz	1760 MHz	1800 MHz	1840 MHz	1880 MHz	1920 MHz
		LED 1	LED 2	LED 3	LED 4	LED 5	LED 6	LED 7	LED 8




FPVspeed™

Equipped with audio board

FPV Video Receiver

VRX-S5

1.7/1.9G 8CH -97dBm

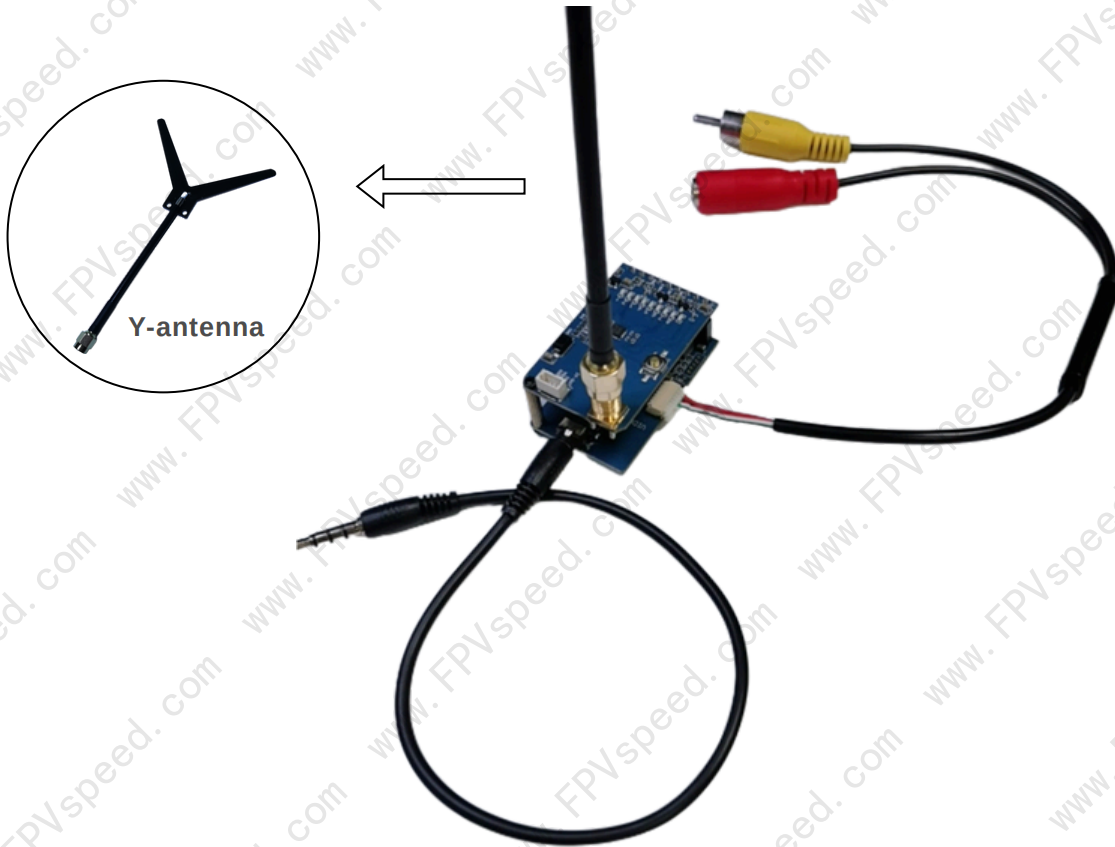

PRECAUTIONS

- Please install the antenna before powering on to avoid equipment malfunction.
- Select the appropriate operating frequency and set both the transmitter and receiver to the same frequency (refer to the frequency table for details).
- Input voltage is 7-36V (2-6S). Do not exceed this voltage range.
- Output voltage/current is 5V/0.5A. If using the receiver to power other devices, ensure that the current draw is within 0.5A. If it exceeds 5V/0.5A, do not use the output terminal, as this may cause damage to the receiver.
- Both 5V and 5V-OUT are output ports. Do not connect to power input or battery to avoid damage.

DISCLAIMER

⚠ This product is intended for civilian and commercial use only. It is strictly prohibited from being used for any military purposes or activities.